

1. SAFETY RULES ON THE PREVENTION OF FIRE AND PANIC

The exhibitor must comply with the safety rules on the prevention of fire and panic in establishments open to the public fixed by the 25 June 1980 order (general provisions).

The 18 November 1987 order defines the particular provisions applicable to exhibition Halls.

The text below is made up of aspects from this legislation and is designed to facilitate understanding.

Any significant projects must be submitted for approval to the Show Security Manager. Furthermore, some structures are subject to approval by the Departmental Consultative Commission on Safety.

These include:

- Marquees, Tents and Structures (MTS) with a surface > 300sq.m,
- Pavilions built in the Static exhibition area, single level, with a ground surface area > 300sq.m,
- Pavilions build in the Static exhibition area with two levels.

Plans and technical information about these must be provided no later than 2,5 months before the Show opens.

During the build-up period, the Security Manager will ensure that the security measures reiterated below are applied.

Further information regarding fire safety is available from:

HANDI'SECUR Tél: +33 (6) 87 99 86 59 Email: handisecur@icloud.com

2. ACCESSIBILITY FOR PERSONS OF REDUCES MOBILITY (PRM)

The exhibitor must comply with French regulations and with the accessibility order.

- All premises and facilities open to the public must allow access to the disabled and to people with reduced mobility.

Applied to the show, this means that:

- minimum width = 0,90 m,
- chamfer 33%, if the high of the floor < 4cm,
- ramp 4 % (no restriction on the length),
- or ramp 5% on a length <10m,
- or ramp 10% on a length <0,50m.
- People with reduced mobility could use the registration banks (H maximum of 0.80 m, empty of 30 cm allowing the passage of the knees 0.70 m height).

3. FIRE REGULATIONS AS THEY RELATE TO THE FITTING OUT OF STANDS

3.1. MATERIALS, RATING REQUIREMENTS

3.1.1. General information

All materials used must have a specific fire rating (French class or Euroclass).

3.1.2. Requirements

- Stand structure and partitions with M3 or D minimum rating (European classification system).
- Large furniture items (cash till, counter, display unit, separator screens, etc.) with M3 or D minimum rating.
- Wall coverings (natural or plastic materials) with M2 or C minimum rating.
- Curtains, hangings or loose voiles with M2 or C minimum rating.
- Firmly fixed floor coverings with M4 or D minimum rating.
- Draped decorative or stand-dressing items (advertising panels if surface area >0.5m2, string decorations, small decorative objects etc.) with M1 or B minimum rating.
- Full canopies with M2 or C minimum rating.
- Ceilings and false ceilings with M1 or B minimum rating.
- Mesh canopies must be CNPP (French test laboratory) certified.

3.1.3. Equivalence

- Non resinous solid wood: if thickness > 14 mm, rated M3 or D.
- Resinous solid wood: if thickness > 18 mm, rated M3 or D.
- Wood-based panels (plywood, boarding, particleboard and fibreboard): if thickness >18mm, rated M3 or D.

ATTENTION: Have the fire resistance test reports for materials used available on each stand. Failing this, have the equivalent fireproofing certificates available on each stand.

3.2. CONSTRUCTION AND FIT-OUT RULES

3.2.1. Prohibited

- Curtains, hangings and voiles in front of exits.
- Paints and varnishes classified as flammable (for example nitrocellulose or glycerophtalic paint).
- The use of signs or advertising panels which features white letters on a green background.
- Stands with several raised levels. Covered upper levels

3.2.2. Covered stands (ceiling, false ceiling or velum)

- Area < 300sq.m.
- If area >50sq.m:
 - Appropriate extinguishers.
 - One security guard holding the "SSIAP1" qualification present.



For any further information, please contact:



- Equipped with autonomous unit security lighting. This security lighting must be put on standby when the normal lighting is intentionally switched off.
- The velum, if used, must be attached securely and supported by a network of perpendicular wires (minimum mesh 1sq.m).

3.2.3. Stand with a raised level: Stands with a raised level are not permitted

3.2.4. Closed stands or rooms

- Send file to HANDI'SECUR to obtain their opinion and approval.
- Number and width of exits:
- If area < 20sq.m: 1 of 0.90m.
- 20sq.m ≤ area < 50sq.m: 1 x 0.90m and 1 x 0.60m.
- 50sq.m≤area<100sq.m:2x0.90mor1x1.40mand1x0.60m.
- 100sq.m≤area<200sq.m:1x1.40mand1x0.90mor3x0.90m.
- 200sq.m ≤ area < 300sq.m: 2 x 1.40m.
- Area > 300sq.m, contact HANDI'SECUR.
- Exits suitably spaced.
- Exits signed.

3.3. FIREPROOFING

Fireproofing can give materials, which are normally fairly or easily flammable M2 or C rating qualities. Spraying, applying with a paintbrush or soaking the material can carry out fireproofing. To obtain certified applicators' contact details, contact:

Groupement Technique Français de l'Ignifugation :

10, rue du Débarcadère – FR 75852 Paris cedex 17 tel: 00 33 1 40 55 13 13

3.4. FIRE CERTIFICATES.

Exhibitors must hold fire resistance test certificates for floor and wall coverings and materials used, or failing this hold equivalent fireproofing certificates on the stand.

It is in the exhibitors' interest to obtain these floor and wall coverings and materials from specialised suppliers or shops, which will avoid the issues associated with on-site fireproofing (the salts used attack metals and the fireproofing is only valid for 3 months). Contact:

Groupement NON FEU 37-39, rue de Neuilly BP 121 - FR 92113 Clichy Cedex Tel: 0033 1 47 56 30 80

4. ELECTRICITY

4.1. EXHIBITORS' GENERAL OBLIGATIONS

Exhibitors must ensure that the following regulations are applied:

- only fixed wiring may be used for electrical systems,
- cables and wires must be Category C2,
- conduits and wire mouldings used for cable troughs, wire ways and cable ducts must be made of flame-retarding material, in compliance with European standards,
- all electrical apparatus, cables and conduits must be earthed,
- if class 0 equipment is to be powered up (exceptionally), it must be equipped with a residual current (maximum 30 mA) differential switch or safety device,
- class I equipment must be connected to the earth wire of the main supply line,
- the use of individual ground plates is forbidden.

4.2. ELECTRICAL EQUIPMENT CABINETS AND BOXES. MUST COMPLY WITH LEGISLATION, NAMELY:

- must have a metal casing,
- must not be accessible to the public,
- must be easily accessible to staff and emergency services,
- must be located a safe distance from all flammable and combustible materials.

IMPORTANT: if total power rating > 100 kVA:

- cabinets and boxes are to be installed in closed premises reserved exclusively for this purpose,
- the premises must be clearly indicated,
- a dry chemical or CO2 extinguisher must be available on the premises,
- partitions must have an M3 fire rating,
- the premises must not be located under a mezzanine that is accessible to the public.

4.3. HALOGEN LAMPS (EN 60 698 STANDARD). STAND LIGHTING THAT INCLUDES HALOGEN LAMPS MUST:

- be a minimum of 2.25 metres from the ground,
- be located a safe distance from all flammable materials (at least 0.50 metre from wood and other decorative material),
- be well secured,
- be fitted with safety glass or fine mesh wire, providing protection against the consequences of a bulb blowing.



Organised by

RX France

52-54 quai de Dion-Bouton

CS 80001 - 92806 Puteaux Cedex

For any further information, please contact: service.technique.wne@rxglobal.com



4.4. HIGH VOLTAGE NEON SIGNS. NEON SIGNS:

- must be protected by a screen made of material with an M3 fire rating,
- the power switch must be clearly marked,
- transformers must not be within reach,
- a sign marked "Danger: high voltage" should be visible nearby.

5. HELIUM BALLOONS

- No helium cylinders (empty or full) are to be stocked in the Hall.
- Balloons must not be fi lled whilst the public is present.
- Balloons must be kept within the confi nes of the stand.
- If the balloon is lit, the exterior must be M2-rated.

6.TEMPORARY INSTALLATIONS OF COOKING DEVICES INTENDED FOR CATERING

- cooking devices are authorised if the total nominal power is lower than 20 kW per stand.
- containers of 13 kg of liquid gas (Butane or Propane) at most are authorised.
- just one cooking installation implanted by stand.
- cookers hoods must be installed above any apparatus giving off exhalation and vapour. The extractor hood must be closed on 3 sides and hang down 0,80m above the cooking area.
- be provided with one or several fire-extinguishers.
- bottles must be placed upright, with the cut-off valve accessible at all times.
- provide at least a fire extinguisher appropriate to the risks with staff trained in its handling during the opening hours of the show to the public (example: provide 1 CO₂ extinguisher of 2kg for an electrical cooking appliance in operation on the stand). Don't hesitate to contact HANDI'SECUR: handisecur@icloud.com

7. USE OF LIQUEIFED HYDROCARBON

- Containers of liquefied gas must contain less than 13kg to be allowed in the pavilion Bottles in used can't be accessible by the public and must be protected against impacts.
- Bottles must be separated from each other by a noncombustible partition or be distant by 5m at least.
- 1 bottle for maximum 10sqm and with a maximum of 6 bottles by stand.
- No bottle (empty or full) can't be stocked in the stand if it is not connected.
- Hose of connection must be changed before the security deadline.
- Bottles have to be stand-up (not angled).
- The turn-off button must be accessible at any time.

8. MACHINERY AND OPERATIONAL EQUIPMENT

OPERATIONAL EQUIPMENT AND MACHINERY FORDEMONSTRATION MUST COMPLY WITH THE FOLLOWING RULES:

- the Organizer must receive a list of all equipment and machinery that is to be operational at the Show, at least 30 days before the Show begins (see form annexed),
- such equipment must not present any risks to public safety,
- stationary equipment or machinery (whether or not operational):
 - any dangerous parts (= moving parts, hot surfaces, blades and sharp objects) must be more than 1 meter from the public thoroughfare or protected by a rigid screen.
- moving equipment or machinery:
 - must be presented in a protected area where members of the public are kept at a distance of at least one meter from the equipment itself.
- hydraulic jacks presented in a raised static position:
 - the equipment's hydraulic safety mechanisms must be supplemented by a mechanical safety device preventing any untimely activation.
 all equipment must be properly stabilized.
- provide at least a fire extinguisher appropriate to the risks with staff trained in its handling during the opening hours of the show to the public (example: provide 1 CO2 extinguisher of 2kg for an electrical cooking appliance in operation on the stand). Don't hesitate to contact HANDI'SECUR: handisecur@icloud.com

Thermical or combustion engine machines and demonstration chimneys shall be equipped with a device to remove combustion gases from the outside. Please contact the Organizer to define the locations for this type of installation and the cost associated.

9. PROHOBITED EQUIPMENT, PRODUCTS, GASES

The following are prohibited at the Show:

- distribution of samples or products containing an inflammable gas,
- balloons inflated with a flammable or toxic gas,
- articles made of celluloid,
- the presence of pyrotechnic or explosives devices,
- the presence of ethyl oxide, carbon sulphide, sulphuric ether and acetone, $% \left(1\right) =\left(1\right) \left(1$
- the use of acetylene, oxygen, hydrogen or equivalent high-risk gases (note: a request for dispensation can be submitted to the French authorities. Apply through HANDI'SECUR, two months before the exhibition opens),
- pyrotechnic effects devices producing detonations, sparks or flames.







10. FLAMMABLE LIQUIDS

Use of flammable liquids is limited to the following quantities per stand:

- 10 litres of flammable liquids of 2nd category for 10m2 of stand, with a max.of 80 litres,
- 5 litres of flammable liquids of 1st category.

11. RADIOACTIVE SUBSTANCES

Authorization to present radioactive substances on exhibition stands can only be granted for demonstration of appliances and when the activities for these substances are less than:

- 37 kilobecquerels (1 microcurie) for those comprising or containing group I radio-elements (4).
- 370 kilobecquerels (10 microcuries) for those comprising or containing group II radio-elements (4).
- 3,700 kilobecquerels (100 microcuries) for those comprising or containing group III radio-elements (4).

Waivers may be granted for the use of substances which have a higher activity subject to the following measures being:

- the radioactive substances must be effectively protected.
- their presence must be indicated by means of basic ionising radiation diagrams as defined by standard NF M 60-101, together with their nature and activity,
- their removal by the public must be rendered materially impossible either by attachment to an appliance for use which requires dismantling with a tool, or by being placed at a distance,
- they must be continuously supervised by one or more specially designated exhibitors,
- when this supervision ceases, even in the absence of the public, the radioactive substances must be stored inside a container which will withstand fire, and which carries very clearly the conventional sign for ionizing radiation,
- the equivalent dose rate, at all points on the stand, must remain below 7.5 microsieverts per hour (0.75 millirads equivalent per man per hour).

The use of radioactive substances must be the subject of a request for authorization (or a waiver) sent to the organizer at least 30 days before the event opens. Thank you to contact:

HANDI'SECUR Tél: +33 (6) 87 99 86 59 Email: handisecur@icloud.com

This request, written on plain paper (The form Material displayed in operation, available on your Exhibitor Area must also be enclosed), must specify the nature and activity of the substances, and the group to which they belong, the names and capacities of the persons responsible for supervising them, and be accompanied by technical instructions for the appliance, a plan showing the siting of the appliance on the stand, and a document drawn up and signed by the installing contractor certifying conformity to these arrangements. No appliance of this type may be put into service if the request for authorization has not been submitted in due time.

Caution: Stands on which radioactive substances are presented must be constructed of and decorated with M1 category materials.

12. X RAYS

Authorization to present appliances which emit X-rays on exhibition stands can only be granted if they and their accessories comply with the rules set by standard NF C 74-100. In particular, the following measures must be taken:

- removal of superfluous objects in the neighborhood of the ray generator and the sample to be examined,
- ordoning off and marking with signs of the zone not accessible to the public,
- the leakage radiation exposure rate must not exceed 0.258 microcoulomb per kilo per hour (1 millirontgen per hour) at a distance of 0.10 m from the radiogenic focal area.

The use of appliances emitting X-rays must be covered by a request for authorization sent to the organizer at least 30 days before the event opens. Thank you to contact:

HANDI'SECUR Tél: +33 (6) 87 99 86 59 Email: handisecur@icloud.com

This request, written on plain paper (The form Material displayed in operation, available on your Exhibitor Area must also be enclosed), must be accompanied by technical instructions for the appliance, a plan showing the siting of the appliance on the stand, and a document drawn up and signed by the installing contractor certifying conformity to these arrangements.

No appliance of this type may be put into service if the request for authorization has not been submitted in due time.

13. LASERS

The use of lasers inside exhibition halls is authorized subject to the following measures being taken:

- the public must under no circumstances be subjected to the direct or reflected beam of the laser,
- -the appliance and its related equipment must be solidly attached to stable mountings,
- -the surroundings of the appliance and the area swept by the beam must not contain items reflecting the wavelengths in question,
- -the casing containing the laser and its possible optical deviation system must be of category I or II (5),
- -during tests conducted whilst the public are not present, exhibitors must make sure that the exhibition and decoration materials, and fireprotection equipment do not react to the calorific energy given out by the light beams.







All laser installations must be covered by a notification sent to the organizer at least 30 days before the event opens. Thank you to contact:

HANDI'SECUR Tél: +33 (6) 87 99 86 59 Email: handisecur@icloud.com

This notification, written on plain paper (The form **Material displayed in operation**, available on your Exhibitor Area must also be enclosed), must be accompanied by technical instructions for the appliance, a plan showing the siting of the appliance on the stand, and a document drawn up and signed by the installing contractor certifying conformity to these arrangements.

No appliance of this type may be put into service if the notification has not been submitted in due time.

14. FIREFIGHTING EQUIPMENT

- The RIA (fire hose), on the stand, will have to remain visible and accessible. The formwork of the RIA (fire plug) is prohibited.
- But, exceptionally, in front of the fire hose, a curtain is authorized? A sign above the curtain (a panel with pictogram or letters RIA, 40 cm x 15 cm) will remind the presence of the fire plug.
- A passage, 1,00 m broad minimum, will be arranged since the aisle.

15. SAFETY AND CLEANING

- It is prohibited to leave crates, cartons, boxes or pieces of wood on the stands and in the passageways.
- The premises must be cleaned a daily basis.







REITERATION OF FRENCH CLASSIFICATION AND EUROPEAN EQUIVALENT

M0 or European A standards: Fireproof
 M1 or European B standards: Flame retardant
 M2 or European C standards: Flameproof

M3 or European D standards: Moderately inflammable
 M4 or European E standards: Highly inflammable


| MATERIALS | AUTHORISED | DOCUMENT TO BE PROVIDED | |
|--|--|---|--|
| Wood (or wood-based composite) > 18 mm non- laminated | Pressed wood chipboard (non-laminated) None (material equated to M3) | | |
| Wood < 18 mm and > 5 mm Wood > 18 mm, laminated | Originally M3 or European D standards Official M3 reports (or material qualit | | |
| Plywood - Chipboard < 5 mm or wood-based composite | M1 or treated on both sides with fireproof painting, varnishing, fire-inhibiting salts or European B standards Official M1 reports or fireproofing certi mentioning the name of the product, specification sheet, date of application | | |
| Floor carpeting | Natural: M4 or European E standards Synthetic: M3 or European D standards | Official reports | |
| Wall covering and fabrics | M1 or fireproofed or European B standards | Official reports or fireproofing certificate mentioning the name of the product, specification sheet, date of application | |
| Plastic materials (plaques, letters) | M1 or European B standards | Official M1 reports | |
| Painting | On M0, M1 or authorized wood supports (nitrocellulose painting forbidden) | Official back-up reports | |
| Suspended décoration (paper, cardboard) | M1 or fireproofed or European B standards | Official reports or fireproofing certificate mentioning the name of the product, specification sheet, date of application | |
| Floral decorations made of synthetic materials | Originally M1 (fireproofing forbidden) or European standards | Official M1 reports | |
| Affixed or stapled decorations (paper) | Without support documentation if affixed along the entire area or stapled every 5 cm Separate installation | | |
| Furnishing | Large pieces of furniture: M3 or C Light-weight structures: M3 or C Upholstery filling: M4 or D Covering: M1 or B | Official reports or fireproofing certificate (without support documentation if furniture is rented from the Palais) | |
| Glass partitions | Reinforced, tempered, laminated Official reports, certificates or with a supp document such as the invoice | | |
| Other materials | Approval to be requested | Written reply from the Head of Safety | |

NB: Official reports: Reports issued by approved French laboratories solely as the statutory controls dated November 1998 now stand or by officially recognized equivalence by any report corresponding to European standards applicable to member countries of the economic union.







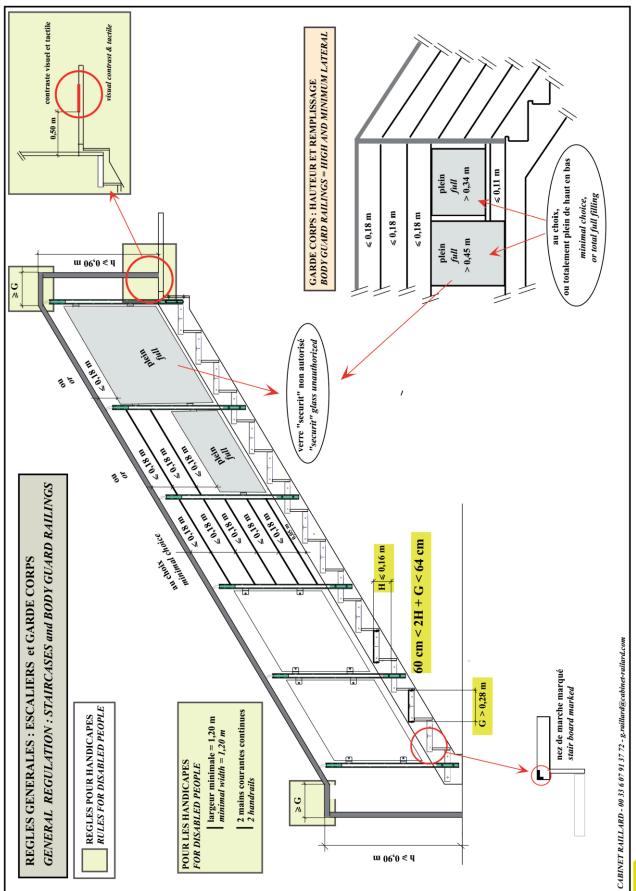





OPERATIONAL EQUIPMENT & MACHINERY FORM

To be returned by 30 days before the opening of the exhibition to: HANDI'SECUR Tél: +33 (6) 87 99 86 59 // Email: handisecur@icloud.com Company: Paris Nord Villepinte - Pavilion 7 / Stand n°: Tel.: Fax: 1. OPERATIONAL EQUIPMENT AND MACHINERY Type or machine or appliance: IMPORTANT: Equipment exhibited in operation must include either screens or fixed and effective protective easing which places any dangerous part out of the public reach or must be settled in such a way the dangerous parts are out of the public reach, or at least at a distance of one meter from circulation aisles. Demonstrations will be carried out under the full and complete responsibility of the exhibitor. 2. USE OF PRODUCTS REQUIRING DECLARATION • Source of electrical power in excess of 100 kVA: • Flammable liquids (other than those in the tanks of motor vehicles): 3. USE OF EQUIPMENTS REQUIRING AUTHORIZATION CAUTION: If you intend to use a product below, please see the article dealing with that product in « FIRE SAFETY REGULATIONS » of this document. Heat or combustion engine: Smoke generator: Liquefied gas (acetylene, oxygen, hydrogen, or any other gas involving the same risks): Radioactive substances:

Date:

Signature:





Note: HANDI'SECUR will notify the exhibitor of the relevant authorities' decisions regarding authorization requests.



WNE: from November 28 to November 30, 2023

Certificate of conformity suspended structures

(structures in blue according to the principle diagram opposite)

| Contrôle sous la responsabilité Viparis | Infrastructure (plafond, poutre, résille d'élinguage) > Contrôlée par un bureau d'études ou mainteneur. |
|--|---|
| | Point d'accroche > Attestation de conformité établie par un organisme agréé ou technicien compétent; > Respect des charges admissibles; > Prisse en compte de besoins Exposants/Organisateurs. |
| | Elingue > contrôlée par le prestataire élinguage. |
| Contrôle sous la responsabilité de l'Exposant/organisatio qu | Point d'accroche > Respect des charges effectives vs. déclarées en phase étudos; > Assurer la double accroche des équipements. |
| donnesur d'ordre | Pont ou autre structure > Werification de l'ensemble des ponts et points d'accroche par un organisme agréé et/ou technicien compétent. |

| Parc des expos - Paris Nord Villepinte - Hall 7 | Name of the stand : | | Number of the stand : | |
|---|---------------------------|---|-----------------------|--|
| Company : | | | | |
| Contact : | | | | |
| Phone number : | Phone number : e – mail : | | | |
| services, - order of 18 november 1987, | laying down | ire and Panic Safety Regulations in ins the exhibition hall, ions de la Porte de Versailles (april 20 | | |
| Points to check: | | | | |
| conformity of the installation in accordance with the specifications of the manufacturer's technical leaflet and in particular, compliance with the load bars and any calculation notes, compliance with the direction of installation of the light bridges, control of the installation of alpha and beta pins,; use of properly checked lifting equipment (periodic check in accordance with applicable standards) and of equal and synchronous power; compliance with the technical specifications established by the event organiser; compliance with the maximum permissible loads per attachment point and compliance with the technical specifications of the site (calculation note at the expense of the competent technician); use and implementation of lifting accessories (cable, slings, shackles, links, etc.) in compliance with applicable standards; compliance of fastening points on suspended structures according to the standards in force in consistency with the loads to be supported; installation of safety slings in the tensioned position, particularly for electric hoists; double securing of the technical elements installed on the light deck or suspended structure, for example the headlamps, the screens, the loudspeakers, the signage elements,, | | | | |
| Competent technician of the cor | mpany | , | | |
| | | checked and will comply with the Fre | | |
| , 5.5 | | | | |



